

shown in Matte White
with 52" Walnut blades



Nan

Designed by Chicago architect Stephen Katz, the Nan ceiling fan is a contemporary take on traditional fan design with superior performance and functionality. The Nan fan feels at home in any room or setting from casual to formal and everything in between. This timeless ceiling fan works in residential environments, restaurants, hospitality or even office settings. The Nan fan has the perfect amount of design presence for any size room or season. The fully adjustable fan motor speeds makes moving the right amount of air simple and easy. The Nan fan will feel like a natural part of the room and enhance any space with a fresh breeze. Also available is the larger Nan XL for larger spaces.

Product Features



DC
Motor



Damp
Location



Silent



Remote
Control



Wall
Control



30° Slant
Ceiling Canopy



60° Cathedral
Ceiling Canopy





shown in Textured Bronze with 52" Walnut blades



shown in Brushed Brass with 42" Gray Ash blades



shown in Matte Black with 42" Matte Black blades



shown in Textured Bronze with 52" Light Maple blades



shown in Brushed Brass with 42" Matte Black blades



shown in Matte White with 42" Matte White blades



shown in Matte White with 52" Barn Wood blades



shown in Matte Black with 60" Walnut blades

NAN

FINISH AND BLADE OPTIONS

SKU#	NK-XXX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Brushed Brass Matte Black Matte White Textured Bronze	BRBR BK MWH TB
Blade Finish	Barn Wood Gray Ash Light Maple Matte Black Matte White Walnut	BW GA LM BK MWH WA
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60

TECHNICAL SPECS

Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152
Blade Material	CNC Cut Solid Wood
Overall Drop	12 inches / 30 cm + downrod length
Fan Weight	18 lbs
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Voltage	110 (Contact us for 220 conversion)
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm
RPM (Low / High)	53 / 235	51 / 202	51 / 152
CFM (Low / High)	941 / 5101	1692 / 7389	2454 / 8251
Watts (High)	20.37	32.61	32.58
CFM/Watt (High)	213	220	256
Blade Pitch	15°	15°	15°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse




White wireless Decora-style, 6-speed, wall control




ACCESSORY 60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.

Blade Options

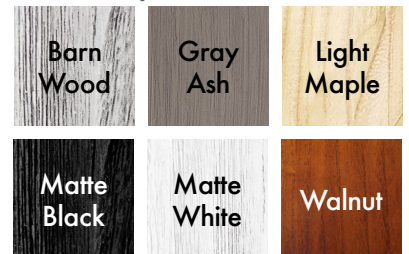

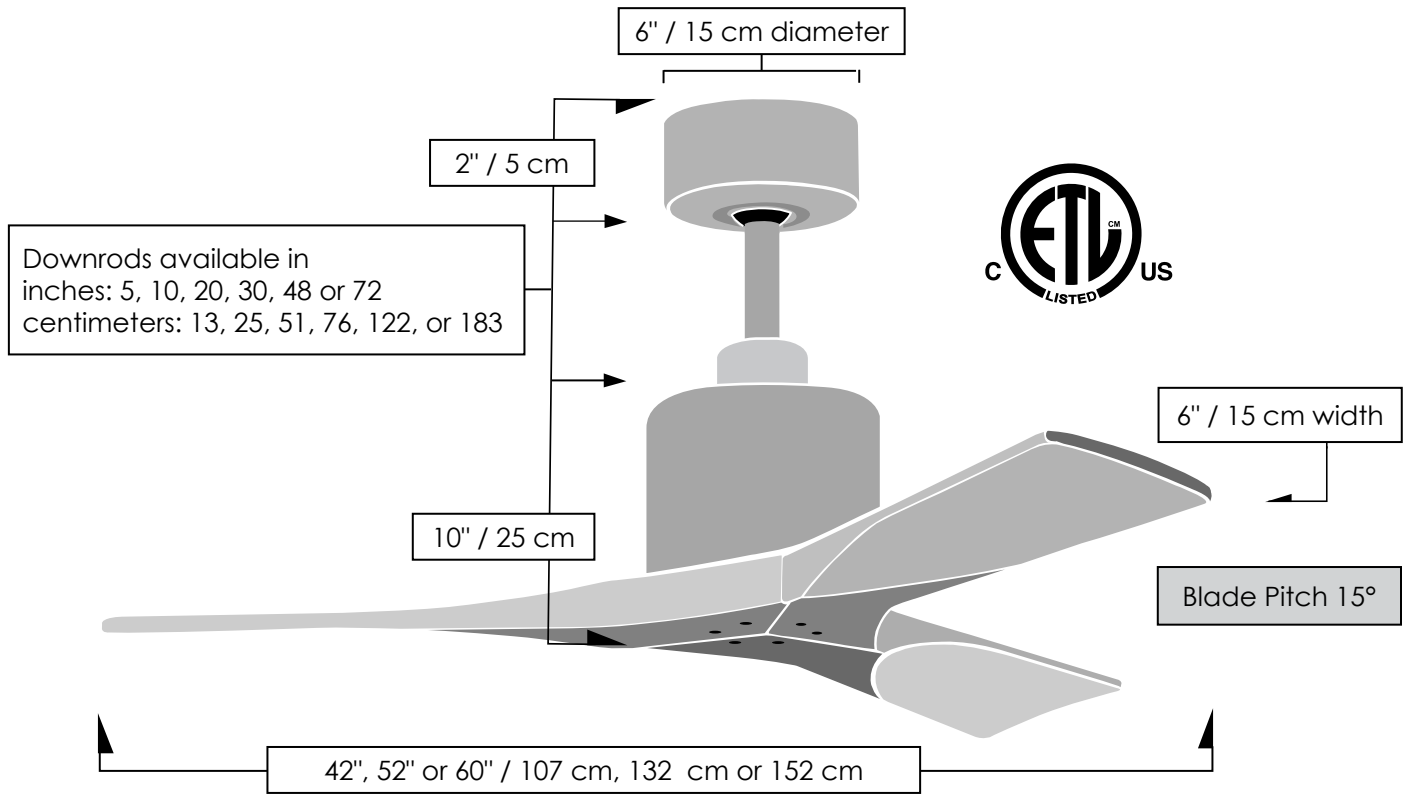

CEILING PITCH TABLE	
0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE	
Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm <i>Use safety cages if applicable</i>
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

Matthews Fan Company

1881 Industrial Drive
Libertyville, IL 60048
Tele: 847.680.9043
Fax: 847.680.8140
www.matthewsfanco.com

© 2023 Matthews Fan Company. All rights reserved.

